

Classico
line



Wood You Like

Barlinek floors in harmony with nature

A woman with short, wavy, light-colored hair is walking away from the camera on a city sidewalk. She is wearing a long, flowing, olive-green dress with a thin gold-colored strap over her shoulder. She is holding a small, black, textured clutch bag in her left hand. The background shows a modern building with large windows and a classic building with arched windows. The text "In a class of its own" is overlaid on the image, centered horizontally and partially obscured by a white horizontal line above it.

In a class of its own

Floors in a Parisian style

...in other words

a renaissance
of Chevron



Construction Chevron

1 Tongue&groove joint

The traditional way of installation of the classic floor. The properly marked the right and left planks give the pattern of French herringbone. The floor is installed by gluing down to subfloor.

2 Wood protection system

Up to 7 layers of UV-hardened acrylic lacquer or a system of UV/natural oil.

3 Surface layer

Selected European or exotic wood of the appropriate thickness, protected with a lacquer or oil finish.

4 Middle layer

Coniferous layer arranged laterally to the surface and a bottom layer. Such construction limits the natural movement of the wood and prevents gaps, cracks and squeaking – even in constantly changing weather conditions.

5 Bottom layer

Coniferous wood arranged laterally to the middle layer reduces the natural work of wood.

* Detailed information on the installation and use of Chevron can be found in the fitting instruction and in the warranty card.



width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

A classic oak floor that is finely softened with a pearl white tint. The boards feature subtle natural accents, which is additionally emphasised by the brushing process. The floor's slenderness and lightness is emphasised by the 4-sided micro-bevel. It is finished in matt lacquer.



Oak Trivor
Chevron 130

1WV000002

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Oak floor in a delicate white colour. The floor is slender and delicate thanks to 4-sided micro-bevel, and the unique wood pattern is emphasised by brushing. It is coated with natural oil.



Chevron 130

Oak Salt
Chevron 130

1WV000007

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Wooden floor with delicate, cream-white staining. Floor refined by brushing and protected by a matt lacquer.



Oak Balos
Chevron 130

1WC000009

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Wooden flooring with a structure that is strongly emphasised by brushing, with lots of natural wooden characteristics. The 4-sided micro-bevel gives the boards an additional authentic appearance. The floor has a beige-ashen colour and it is finished with matt lacquer.



Oak Serene
Chevron 130

1WV000005

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Oak flooring in a naturally warm colour with the subtly accented natural characteristics of wood. The pattern of the growth rings is enhanced by the brushing process. Its authentic appearance is emphasized by the 4-sided micro-bevel. The entire board is finished in matt lacquer.



Chevron 130

Oak Caramel
Chevron 130

1WV000001

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Wood floor in the natural colour of classic oak. The floor is coated with natural oil, which enhances the noble structure of the wood, additionally emphasised by brushing. Thanks to the 4-sided micro-bevel, the floor has gained an impression of lightness and slenderness.



Oak Bright
Chevron 130

1WV000006

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Oak flooring featuring a strongly rustic appearance and natural colour. The beauty of the wood is emphasised by brushing, and the 4-sided micro-bevel gives it a slender appearance. It is finished in matt lacquer.



Chevron 130

Oak Raisins
Chevron 130

1WV000003

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

An oak board with strongly exposed wooden characteristics and a pleasant shade of warm brown. The floor was brushed and chamfered to emphasise its structure and form. It is finished in matt lacquer.



Chevron 130

Oak Mainland
Chevron 130

1WV000004

Wood features scale of intensity





In a class of its own

Herringbone

in modern style



Innovative Joint from Barlinek

The only such joint on the market!

The many years of experience of our R&D team have led to the development of the Classic Herringbone joint, which enables installation without the need for a right and left-hand board.*

Front joint Optilock®

Is an innovation on the flooring market that Barlinek can boast. This is Barlinek's new glueless front joint to make installation of Classic Herringbone boards clean, quick and easy.

* See the installation instructions and warranty card for detailed information on the installation and use of the Classic Herringbone boards.



width 180 mm, length 725 mm, microbevelled, brushed, matt lacquer

Classic herringbone pattern with an exclusive width of 180 mm with the structure of the wood strongly emphasised by brushing and marked bevelled edges. Finished with matt lacquer.



Herringbone 180

Oak Cappuccino

Herringbone 180

1WC000027

Wood features scale of intensity





width 180 mm, length 725 mm, microbevelled, brushed, matt lacquer

A floor with a moderate amount of wood features with an exclusive width of 180 mm and exquisite four-sided bevelling. The floor is finished with matt lacquer.



Herringbone 180

Oak Caramel
Herringbone 180

1WC000024

Wood features scale of intensity





width 180 mm, length 725 mm, microbevelled, brushed, matt lacquer

An oak floor with a very rustic character and a natural colour. The beauty of the wood was emphasised by brushing, and the 4-sided micro bevelling made it slender. Finished with matt lacquer.



Herringbone 180

Oak Raisins
Herringbone 180

1WC000025

Wood features scale of intensity





width 180 mm, length 725 mm, microbevelled, brushed, natural oil

Classic herringbone pattern with a refined shade combining gold and warm brown, boasting an exclusive width of 180 mm. The floor has undergone the process of brushing and edge bevelling. Coated with natural oil.



Herringbone 180

Oak Toffee
Herringbone 180

1WC000028

Wood features scale of intensity





width 180 mm, length 725 mm, microbevelled, brushed, matt lacquer

The oak floor is arranged in the classic herringbone pattern with a unique width of 180 mm and an exceptional warm hue of antique brown. The structure of the wood is emphasised by brushing, and the edges are trimmed with micro bevelling. Finished with matt lacquer.



Herringbone 180

Oak Brown Sugar
Herringbone 180

1WC000026

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, matt lacquer

Ash floor with a delicate, creamy, colour. The impression of slimness in the boards is emphasised by its 4-sided micro-bevel. It is coated in matt lacquer.



Ash Moonlight
Herringbone 130

1WC000018

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, matt lacquer

An oak floor with a characteristic light colour of wood obtained by bleaching. Thanks to the 4-sided micro bevelling, the floor becomes slender. The floor is coated with matt lacquer.



Herringbone 130

Oak Bianco
Herringbone 130

1WC000021

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

A single plank oak floor with a delicate, creamy white tinting. The boards are refined by brushing and protected with matt varnish.



Oak Cappuccino
Herringbone 130

1WC000010

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Oak floor with a delicate, white colour scheme. It has subtly bevelled edges and a clear wood structure obtained by brushing. Finished with natural oil.



Oak Dartmoor
Herringbone 130

1WC000036

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

An oak floor with a cream hue obtained thanks to double staining, additionally emphasised with a white brush. The micro bevelling emphasises adds slenderness. Finished with matt lacquer.



double staining

Oak Pudding
Herringbone 130

1WC000029

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Double stained oak flooring. Natural character of the wooden floor emphasized by brushing on the white matt lacquer surface. 4-s beveling emphasizes the sophisticated wooden floor and plank effect



Oak Grissini
Herringbone 130

1WC000013

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Oak floor with a delicate white tint. The 4-sided micro bevelling makes it slender and refined, and the brushing treatment additionally emphasises the unique grain pattern. Coated with natural oil.



Herringbone 130

Oak Salt
Herringbone 130

1WC000035

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

An oak floor with a delicate creamy-white colouring. Boards enriched by brushing and protected with matt lacquer.



Oak Trivor
Herringbone 130

1WC000008

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Single plank, grey-coloured boards, emphasized by brushing the natural structure of the wood. Covered with matt varnish.



Oak Marzipan Muffin
Herringbone 130

1WC000014

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Wooden floor with delicate, cream-white staining. Floor refined by brushing and protected by a matt lacquer.



Herringbone 130

Oak Balos
Herringbone 130

1WC000009

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Oak floor with a warm shade obtained by staining. Covered with matt lacquer, the structure of the wood is emphasised by brushing, and the edges of the floorboards are subtly trimmed with micro bevelling.



Herringbone 130

Oak Lombardy

Herringbone 130

1WC000009

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, matt lacquer

Ash floor in a warm gold colour. On the edges, a four-sided micro-bevel is applied, which enhances the impression of nobility. The board is finished in matt lacquer.



Herringbone 130

Ash Auric
Herringbone 130

1WC000019

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Caramel Piccolo consists of brushed boards with bevelled edges, which intensifies the impression of a noble and traditional oak floor. Matt lacquer is used for the finishing.



Herringbone 130

Oak Caramel
Herringbone 130

1WC000007

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Grand Canyon Piccolo has a slightly rustic character, achieved by brushing the boards and bevel on the edges. The floor is finished with natural oil.



Herringbone 130

Oak Grand Canyon
Herringbone 130

1WC000011

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Oak floor with a clear wood pattern enhanced by brushing. The slenderness of the floorboards is emphasised by the use of a 4-sided micro beveling. Finished with matt lacquer.



Herringbone 130

Oak Madeira
Herringbone 130

1WC000033

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

An oak floor with a rustic appeal. The structure of the wood has been emphasised by brushing, and the edges of the floorboard are highlighted with micro bevelling. Coated with matt lacquer.



Herringbone 130

Oak Raisins
Herringbone 130

1WC000034

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Oak floor with a beautiful colour and various wood features. The natural character is emphasised by brushing, and the 4-sided micro-bevel gives the impression of slimness. Pleasant to the touch, thanks to its natural oil coating.



Oak Bright
Herringbone 130

1WC000012

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, natural oil

Single plank oak floor bathed in the tones of gold and warm brown. The slimness of the oil-coated natural boards is achieved by bevelling on 4 sides. The uniqueness and richness of the wood's characteristics is highlighted during the brushing process.



Herringbone 130

Oak Toffee
Herringbone 130

1WC000017

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

An oak board with strongly exposed wooden characteristics and a pleasant shade of warm brown. The floor was brushed and chamfered to emphasise its structure and form. It is finished in matt lacquer.



Herringbone 130

Oak Mainland
Herringbone 130

1WC000022

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Oak floor in a warm shade of antique brown. Covered with matt lacquer. Wood grain emphasized by brushing and micro-bevel on the edges of the board. The floor comes in a single plank version.



Herringbone 130

Oak Brown Sugar
Herringbone 130

1WC000006

Wood features scale of intensity





width 130 mm, length 725 mm, microbevelled, brushed, matt lacquer

Floor suffused with the intense colour of dark chocolate that highlights its unique features. The matt lacquer softens the natural wood structure exposed in the brushing process. The edges of the boards have been accentuated by 4-sided bevelling to make them more slender.



Herringbone 130

Oak Trapani
Herringbone 130

1WC000030

Wood features scale of intensity





width 110 mm, length 660 mm, microbevelled, brushed, matt lacquer

Oak floor in a pearl-white colour. The boards are brushed, which accentuates the natural grain of the wood, and the 4-sided micro-bevel emphasises its slimness and lightness. The boards are finished in a subtle matt lacquer.



Herringbone 110

Oak Cappuccino Herringbone 110

1WC000001

Wood features scale of intensity





Oak floor in a gentle cream hue. Thanks to the four-sided micro bevelling, it creates the impression of slenderness. Finished with matt lacquer.



Oak Mont Blanc
Herringbone 110

1WC000031

Wood features scale of intensity





width 110 mm, length 660 mm, microbevelled, brushed, matt lacquer

Oak floor in a beige-ash shade, with a full range of natural-wood features. The wood pattern is emphasised by brushing, and the 4-sided micro-bevel gives it a distinguished look. It is coated in matt lacquer.



Herringbone 110

Oak Serene
Herringbone 110

1WC000002

Wood features scale of intensity





width 110 mm, length 660 mm, microbevelled, brushed, natural oil

Oak floor with an unfinished look, achieved by exclusive staining. The floor owes its subtlety to the four-side micro-bevel, and the grain pattern is emphasised by brushing. Finished in natural oil.



Herringbone 110

Oak Ramsey
Herringbone 110

1WC000015

Wood features scale of intensity





width 110 mm, length 660 mm, microbevelled, brushed, natural oil

Oak floor with a beautiful colour and various wood features. The natural character is emphasised by brushing, and the 4-sided micro-bevel gives the impression of slimness. Pleasant to the touch, thanks to its natural oil coating.



Herringbone 110

Oak Bright
Herringbone 110

1WC000016

Wood features scale of intensity





width 110 mm, length 660 mm, microbevelled, brushed, matt lacquer

A subtly accentuated oak floor, with various wood features. The natural-grain pattern and the depth of colour are highlighted by brushing, and the 4-sided micro-bevel emphasises its character. It is finished in matt lacquer.



Herringbone 110

Oak Caramel
Herringbone 110

1WC000004

Wood features scale of intensity





width 110 mm, length 660 mm, microbevelled, brushed, matt lacquer

Oak floor in a warm brown colour, with strongly accentuated wood characteristics. The grain pattern is emphasised by brushing, and the 4-sided micro-bevel further enhances the floor. It is coated in matt lacquer.



Herringbone 110

Oak Mainland
Herringbone 110

1WC000003

Wood features scale of intensity





An oak floor with a pleasantly warm shade of antique brown. The structure of the floorboards has been emphasised by the brushing process, and the bevelled edges add lightness to the floor. The floor is finished with matt lacquer.



Herringbone 110

Oak Brown Sugar
Herringbone 110

1WC000030

Wood features scale of intensity





PURE

line

Wood in its purest form.

The highest quality plain floorboards with a width of 180 mm and 155 mm, transparent lacquered and oiled. Such floorboards are an exclusive and most impressive way to display the natural beauty of the material.



Classico

line

A class of its own.

The natural floor, arranged in a timeless pattern of Chevron and classic herringbone, fits into any style of interior. Chevron pattern gives the rooms an elegant character. Herringbone pattern is intended for people who value tradition and at the same time focus on modern design.



DECOR

line

The latest trends in colour.

For those who appreciate modern design and original colours. Floorboards with a width of 180 mm and 155 mm stained in the most fashionable shades are perfect for seekers of avant-garde solutions.





Life


line

The beauty of wood, unrivalled durability.

The 207 mm wide three-strip floorboards of exceptional durability ensured by a super-resistant lacquer - a two-time winner of the international abrasion and stain resistance test and 130 mm wide plain floorboards.

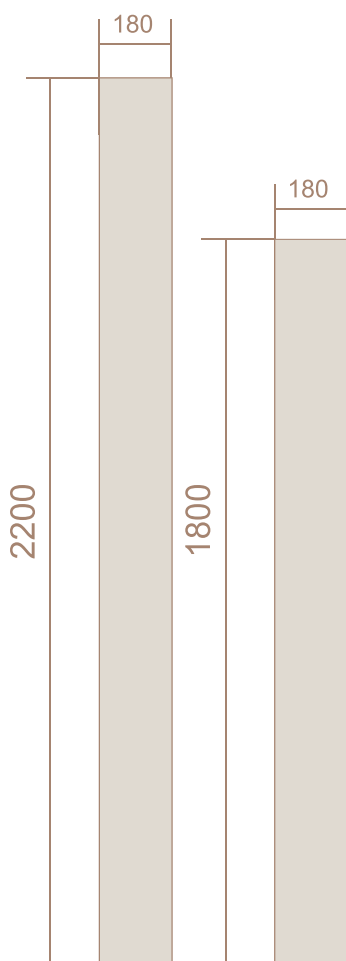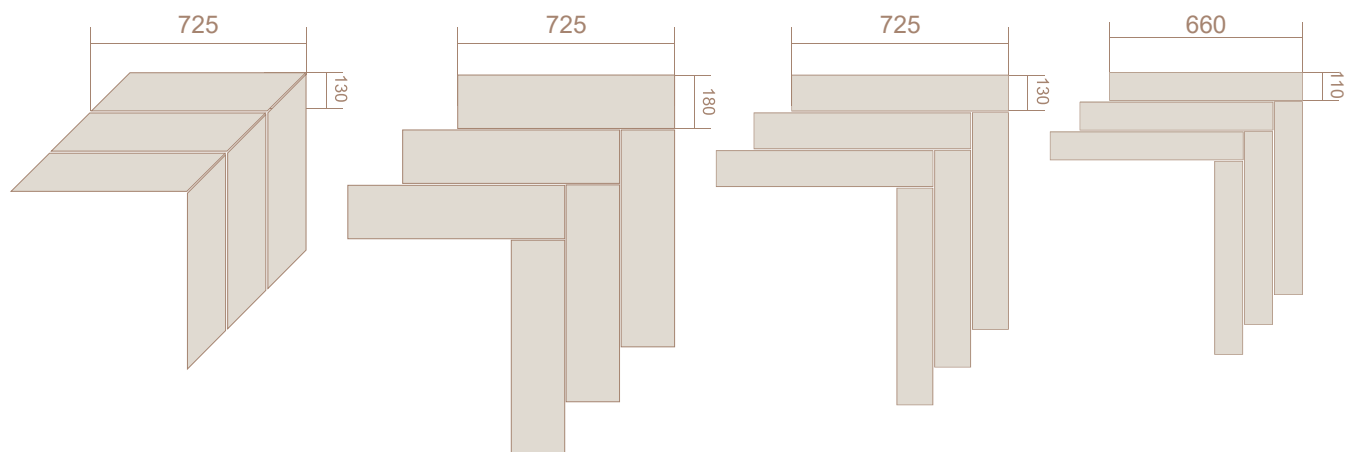**GRANDE 180**


The 180 mm wide, 2200 mm long and 1800 mm long plain floorboards. Floorboards of this size can be found in the PURE and Decor series.

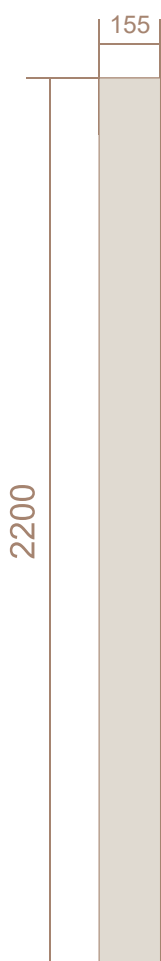**MEDIO 155**

Plain floorboards, 155 mm wide and 2200 mm long. Floorboards of this size can be found in the PURE and DECOR series.

**PICCOLO 130**

Plain floorboards with a width of 130 mm are available in three lengths – 2200 mm, 1092 mm and 725 mm. Floorboards of this size can be found in the LIFE series.

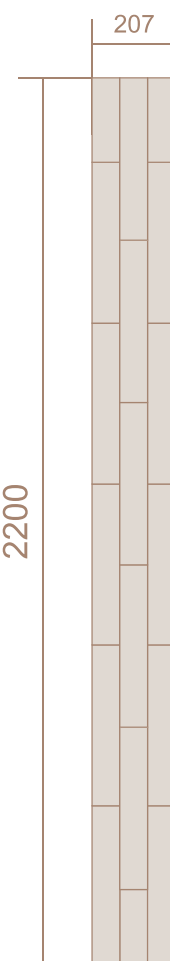**MOLTI 207**


Three-strip floorboards, 207 mm wide and 2200 mm long. Floorboards of this size can be found in the LIFE series.






Wood features scale of intensity

A very large quantity	● ● ● ● ● ●
Large quantity	● ● ● ● ●
Moderate quantity	● ● ● ●
Small/moderate quantity	● ● ● ●
Very small quantity	● ●

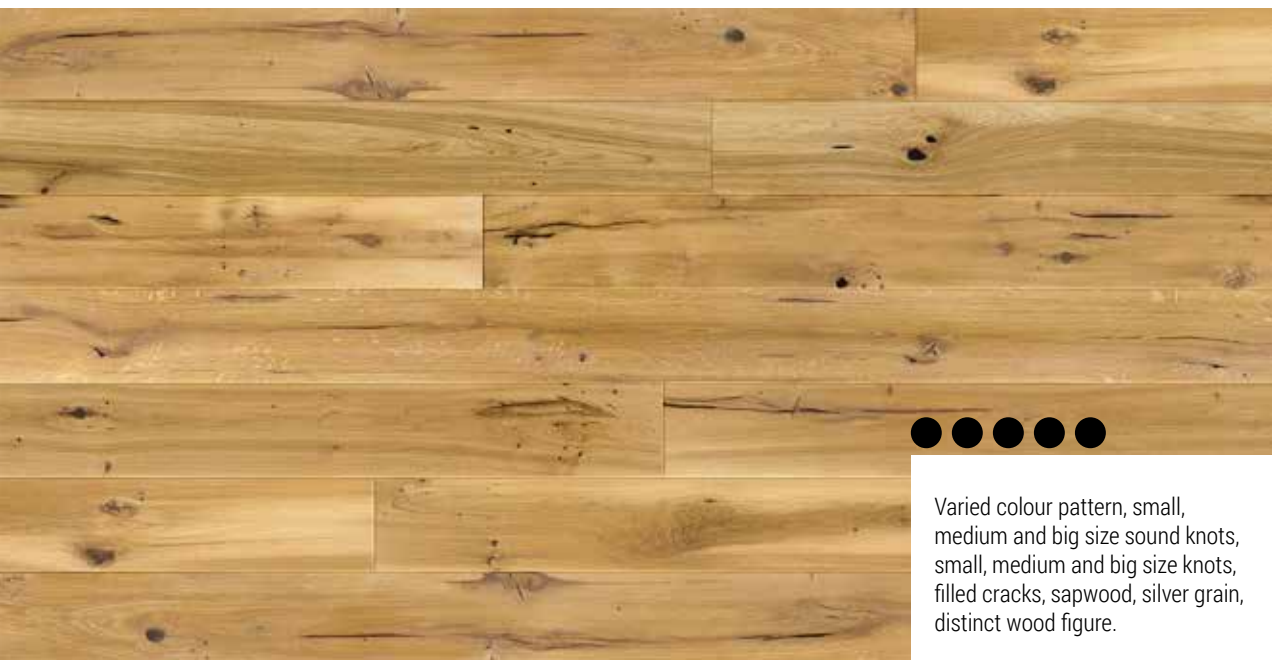

Varied colour pattern, small, medium and big size sound knots, small, medium and big size knots, filled cracks, sapwood, silver grain, distinct wood figure.

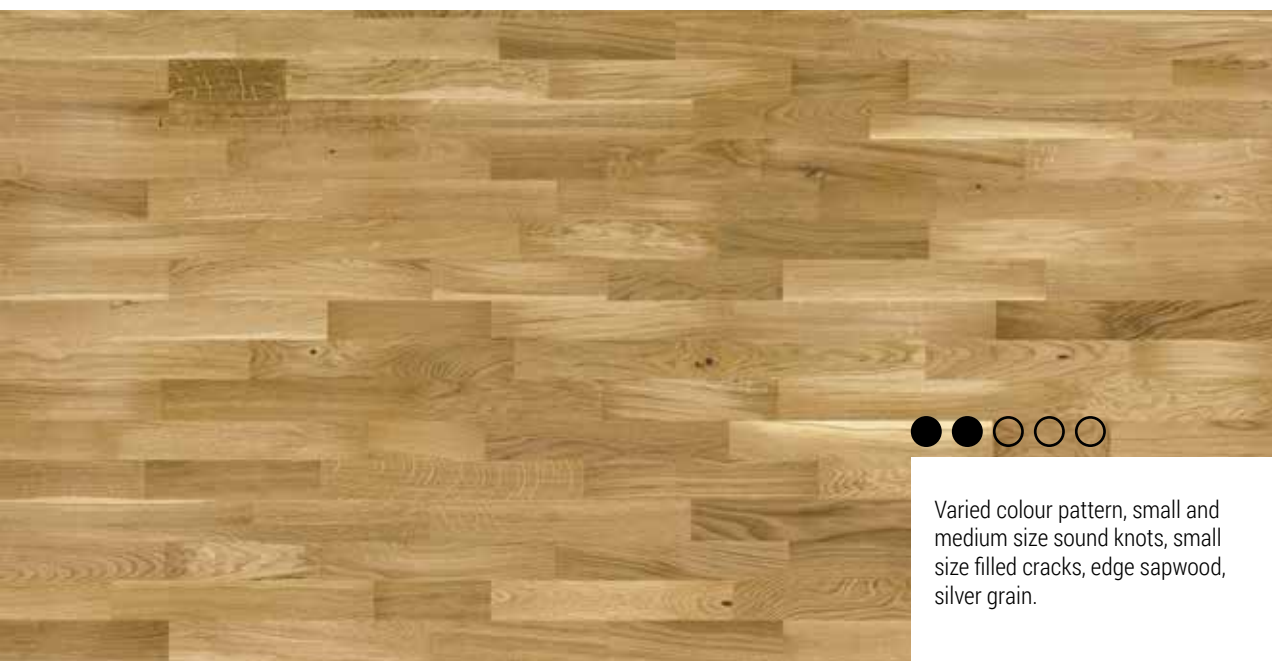

Varied colour pattern, small and medium size sound knots, small size filled cracks, edge sapwood, silver grain.

Oiled floors




Natural oil

Natural oil penetrates the pores of the wood, impregnating it against moisture and bringing out the natural features of the wood.



The natural oil structure

The process of oil absorption by the structure. The oil hardens in contact with oxygen.

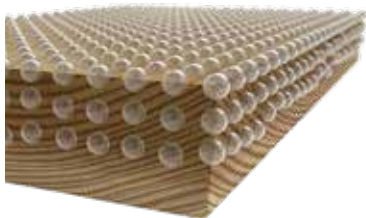

UV oil

UV oil forms a protective oil coating on the surface of the wood and increases the floor's resistance to dirt.



The UV-oil structure

The UV-oil structure hardens on impact with ultraviolet light.



Lacquered floors



Lacquered floors

Multi-layered coating with a UV-hardened lacquer system protects the floor by forming a surface safeguarding it against abrasion, dirt and micro-scratches.



Matt lacquer

Emphasises the natural character of the wood floor and the depth of its design.



Semi-matt lacquer

Intensifies the impression of cosiness and warmth.



High gloss lacquer

An excellent solution for impressive elegant interiors.

Barlinek Floors finishing

7 000 revolutions*
The most resistant
lacquer on the market

The Best in Test!

Barlinek flooring is victorious in an independent quality test of wooden floors conducted by the Technical Research Institute of Sweden. Our floor turned out to be more abrasion- and stain-resistant than floors from the other leading European producers!


Super-resistant Professional Lacquer

Super-resistant Professional Lacquer works excellently even in heavily used rooms. Winner of a Swedish abrasion resistance test. The results of the test also confirm that this is the lacquer most resistant to food stains, including coffee and red wine.



Bevelling

Bevelling involves slightly trimming a small part of the flooring's edge to highlight the individual boards to make the room look bigger.

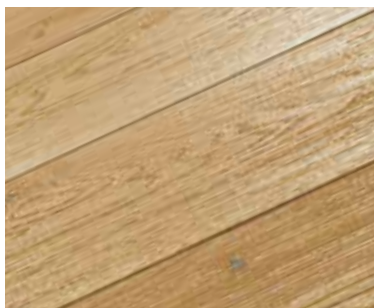

Brushing

Brushing is a modern method of stressing the natural beauty of the wood graining and bringing out its structure. The texture of brushed wood is discernible to the touch.



Staining

Flooring is coloured by coating the surface with lacquer, oil or refined stain with a protective layer of lacquer.

Assemblage



Standard installation kit

Installation kit includes the tools necessary to install multilayer flooring.

The set includes:

- metal holder
- wooden tapping block

ZEM001001



Professional profiled tapping block

Used when assembling layered wooden floors with every kind of frontal and lateral lock.

- made from highly resistant plastic material.
- effectively absorbs the impact of a hammer

ZEM003002

Floating Method Underlays Fix Mat



FixMat SOUND 2,1SD

Durable polyurethane-mineral mat, thickness: 2,15 mm, integrated with vapor-barrier foil:

- Perfect for underfloor heating and cooling systems
- Ecological – up to 92% made from natural ingredients
- Makes the floor perfectly silent,
- Hard and durable – protects the locks against the damage
- Flame-retardant class BflS1
- A self-adhesive tape is integrated to help in joining the mat

Packaging 7,5 m² - POD007001



Extreme 1.5

Professional, ecological underlay, thickness: 1,5 mm:

- Protects the board joints (heavy load resistance)
- Mutes the floor
- Perfect for underfloor heating (does not apply to Hybrid - WSPC floors)
- Is also suitable for Hybrid (WSPC) and SPC floors laid in a floating system

Opakowanie: 10 m² - POD007002



Cork mat

- (thickness: 2 mm) - made of natural cork, durable and flexible:
- Good sound insulation
- Resistant to heavy loads (high density)
- Can be used on underfloor heating
- Easy and quick to install

Packaging: 10 m² - POD002001

Underfloor board EKO

(different thicknesses

– 3 mm; 4 mm; 5,5 mm; 7 mm)

– made of natural wood fiber:

- Perfect thermal insulator (not suitable for underfloor heating)
- Will help with undulations of the subfloor up to ca. 3 mm (depending on the thickness)
- Good sound insulation
- Resistant to loads

Packaging: 9,32 m².

grey tile 3,0 mm: POD001006

Packaging: 6,99 m².

grey tile 4,0 mm: POD001003

grey tile 5,5 mm: POD001001

grey tile 7,0 mm: POD001002



Adhesive Method



Adhesive based on hybrid polymer Barkiet 1K 950

Professional one-component adhesive, based on silane-modified polymer.

Flexible, strong adhesive, wide range of applications, water free, EC1Plus low emission.

Recommended to all types of wooden floors (including factory finished engineered wooden floors). Suitable for underfloor heating. Solvent-free.

Packaging: 15 kg - KLJ001006



Barlinek 1K STP Primer

Single component polyurethane primer for strengthening cement, anhydrite and concrete floors. Applied before gluing down the Barlinek board using Barlinek 1K STP adhesive. Solvent-free.

Packaging: 5L - KLJ001007

Barlinek floors installation




Advantages of the floating system:

- You can assemble it yourself, i.e. simple,
- cheap and quick assembly.
- You can lay it on top of old flooring
- and unrestored floors.
- The floor is ready for use
- immediately after installation.
- Damaged boards can be replaced easily.
- Possible to lay over underfloor heating.



Advantages of the adhesive system:

- Very good acoustic insulation.
- No knocking or squeaking sounds
- It can be laid over large surfaces without
- the necessity to use expansion gaps
- Assembly system recommended
- for underfloor heating.







Skirting
PW9H white painted – P9H27362A




Skirting
PW92 white painted – P9227362A




Skirting
PW95 white painted – P9527362A




Skirting
PW90 white painted – P9027362A




Skirting
P61 white foiled – P6118101A




Skirting
PW70 white painted – P7027362A




Skirting
PW7C white painted – P7C27362A




Skirting
P50 white foiled – P5018101A




Skirting
PW6P white foiled – P6P18101A




Skirting
P20 white foiled – P2018101A



Skirting
PW58 white painted – P5827362A



Skirting
PW46 white painted – P4627362A



Skirting
P4P white foiled – P4P18101A

may be painted



White skirting boards


Elite series

is a prestigious collection of natural wooden skirting, white painted. The skirting composes beautifully with any type of flooring. White skirting is recommended for any floor.






Skirting
Oak lacquer P61 – P6101011A




Skirting
Oak lacquer P78 – P7801011A



Skirting
Oak lacquer P30 – P3001011A




Skirting
Oak lacquer P6P – P6P01011A



Skirting
Oak lacquer P50 – P5001011A




Skirting
Oak lacquer P20 – P2001011A



Skirting
Oak lacquer P70 – P7001011A
Oak lacquer P71 – P7101011B



Skirting
Oak lacquer P10 – P1001011A



Skirting
Oak lacquer P4P – P4P01011A



Biała - patrz kolekcja ELITE



Oak Gentle
P50: P5001312A, P61: P6101312A,
P6P: P6P01312A



Ash lakier biały
P20: P2002031A,
P50: P5002031A



Oak Sense
P50: P5001332A



Oak Harmony
P50: P5001342A, P61: P6101342A,
P6P: P6P01342A



Oak olej biały
P20: P2001041A,
P50: P5001041A



Oak lakier biały matowy
P10: P1001031A, P20: P2001031A,
P50: P5001031A, P61: P6101031A



Oak Touch
P20: P2001242A, P50: P5001242A,
P61: P6101242A, P6P: P6P01242A



Ash Platinum
P50: P5002322A



Ash lakier
P10: P1002011A, P20: P2002011A,
P50: P5002011A



Ash lakier wysoki połysk
P50: P5002081A



Oak surowy
P20: P2001121A



Oak lakier
P10: P1001011A, P20: P2001011A,
P30: P3001011A, P50: P5001011A,
P61: P6101011A, P70: P7001011A,
P78: P7801011A, P4P: P4P01011A,
P6P: P6P01011A



Oak ciemny
P20: P2001072A



Oak Excite
P50: P5001302A



Oak Honey
P20: P2001222A



Iroko lakier
P20: P2012012A



Tali lakier
P20: P2008012A,
P50: P5008012A



Oak Olive
P50: P5001252A



Oak Terra
P20: P2001212A, P50: P5001212A,
P6P: P6P01212A



Oak Antic
P20: P2001052A, P50: P5001051A



Oak Bonet
P50: P5001412A



Ash Hazelnut
P50: P5002382A



Oak Still
P50: P5001422A, P6P: P6P01422A



Oak Biscotti
P50: P5001432A



Sapella lakier
P50: P5003011A



Ash Coffee
P20: P2002062A



Oak Espresso
P50: P5001022A



Wenge lakier
P20: P2009012A


Barlinek skirtings offer

Necessary finish



- made of 100% wood, covered with veneer on the exterior
- available in many shapes and colours
- excellent dimensions stability
- durability thanks to the use of high quality wood
- durable merging of the veneer with the wooden skirting core
- factory-made protection of surface

Clip for attaching skirting boards


A metal mounting clip enabling quick, safe and easy mounting of any Barlinek skirting board.

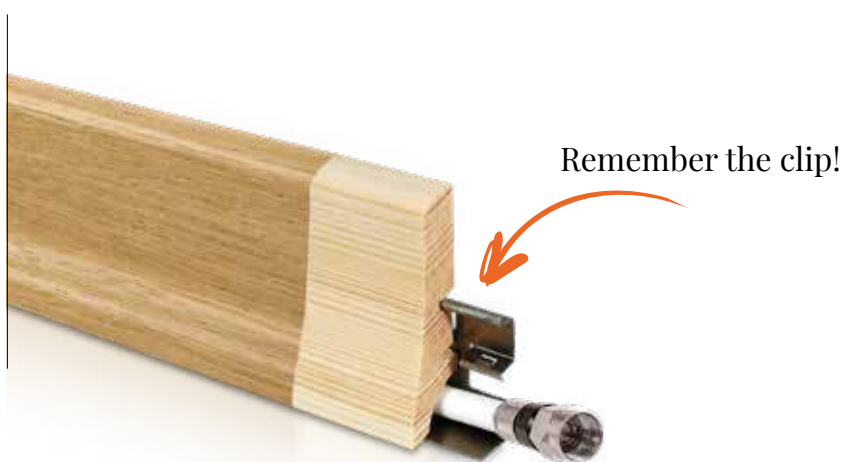


Clip 15 pcs: KLI001001
Clip 50 pcs: KLI001002

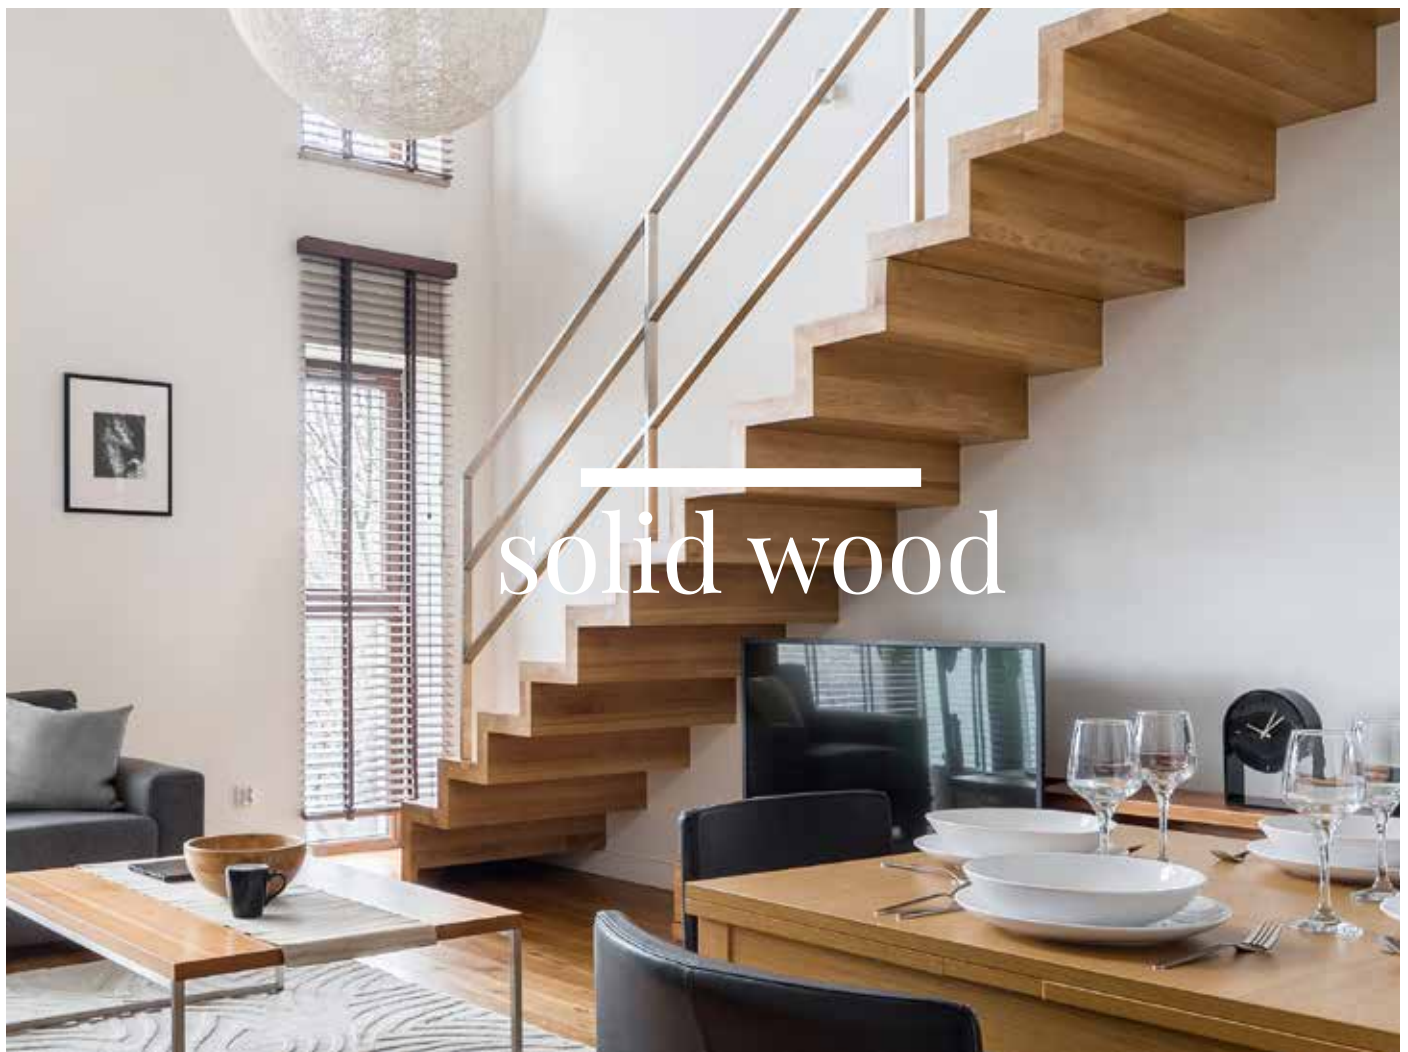


Rosettes





Finishing skirting board




T-moulding



Threshold skirting board



Low stairnose skirting board



High stairnose skirting board

Special skirting boards

Barlinek offers special skirting concealing dilatation, as well as stairs and treshold skirting.



Oiled wood floors

Everyday
care



WASH CARE

Concentrate for everyday cleaning of naturally oiled wood floors. Refreshes the surface and prevents it getting dirty again. It has anti-slip properties
Yield approx: 150 m²/1L.

PRT004003

First and
recurring care



WAX CARE PLUS

Płynny środek do zabezpieczenia i konserwacji drewna na bazie naturalnych surowców. Regularna konserwacja chroni powierzchnię drewna, regeneruje ją i konserwuje.
Yield approx: 100-110 m²/1L.

PRT004005

Thorough
cleaning



MAGIC CLEANER

Środek do intensywnego czyszczenia wszystkich powierzchni drewnianych, korkowych pokrytych olejem, woskiem lub lakierem.
Yield approx: 100 m²/1L.

PRT004004

lacquered floors



PROTEKTOR CONCENTRATE

Concentrate for everyday care of lacquered floors. Contains no wax which facilitates the subsequent renovation of the floor. Does not leave stains or streaks. Forms a resistant, antistatic, non-slip film on the floor surface. It can also be used on stone and ceramic floors.
Yield approx: 500 m²/1L.

PRT001002



PROTEKTOR SHINE

A care agent for periodic maintenance of lacquered wood floors. Forms a highly resistant coating that is renewed during subsequent uses. Old and scratched surface regains its lustre without the need for lacquering. Product ready for use in undiluted form.
Yield approx: 100 m²/1L.

PRT001001



PROTEKTOR COMPLETE

Concentrated intensive-action agent for degreasing and periodic deep cleaning of lacquered floors. Effectively removes stubborn dirt, stains and old layers of pastes and other maintenance agents, including old coatings of Protektor Shine. Ideal for use before lacquering floors, and also before refreshing with Protektor Shine.
Yield approx: 200 m²/1L.

PRT001003

Floor care and protection

Beautiful for years and years!

The worst enemies of a floor are water and sand. We keep it clean by sweeping, vacuuming and occasional wiping with damp (but not wet!) cloth. It is recommended to use cleaning articles suggested by the manufacturer for different types of flooring (natural oil, uv oil, lacquer). To protect from the damaging effect of sand and water, as well as salt in the winter, we should place mats near the entry of the house.

We should avoid walking on high heels on the floor. Furniture legs, pedestals and other forms of pressure on the floor should be secured with felt (but it mustn't be adjusted with nails). The floor under office chairs on wheels should be protected with mats. It is not recommended to mount flooring on surface with high humidity or exposed to direct contact with water.





Barlinek S.A.

Al. Solidarności 36, 25-323 Kielce

tel.: +48 41 333 11 00

fax: +48 41 333 00 00

e-mail: info@barlinek.com.pl

barlinek.com



We plant one tree for each package of Barlinek floorboards.



Saving the Peregrine Falcon.



The "Bartek" Oak Tree in our care.